



**THE ORIGINAL**

Ceramic tiles - Dry installation

DRY|ILE

As fast as your business.



**Green  
Product  
Award**  
Winner  
2020

# CONTENTS

## The advantages of DryTile

Pages 4 - 7

## Installation

Pages 8 - 9

## Innovative surface finishes Hytect and Protecta

Pages 10 - 11

## DryTile series

Pages 12 - 54

Alcina	14 - 15
Cedra	16 - 17
Emotion	18 - 19
Evalia	20 - 21
Geo 2.0	22 - 23
Kiano	24 - 25
Mandalay	26 - 27
Nova	28 - 29
Pizarro	30 - 31
Remix	32 - 33
Sierra	34 - 35
Somero	36 - 37
Soul	38 - 39
Stories	40 - 41
Streetlife	42 - 43
Timeless	44 - 45
Trias	46 - 47
Unique	48 - 49
Valley	50 - 51
Xeno	52 - 53

## Joint colors

Page 54





Macrina Bakery, Seattle, Washington, USA


## As fast as your business.

Ceramic tiles for dry installation

Time is one of the most valuable resources available; ceramic tiles are among the most sustainable floor coverings. Whether in shop fitting, catering, the hotel trade or administration: DryTile enables the installation of a high-quality floor with all of the advantages of ceramic – and within record time. With a cork layer on the back, thereby dispensing with adhesive altogether, DryTile can be laid up to 8 times faster. This saves time, reduces closing times and optimises installation processes.



# The DryTile formula

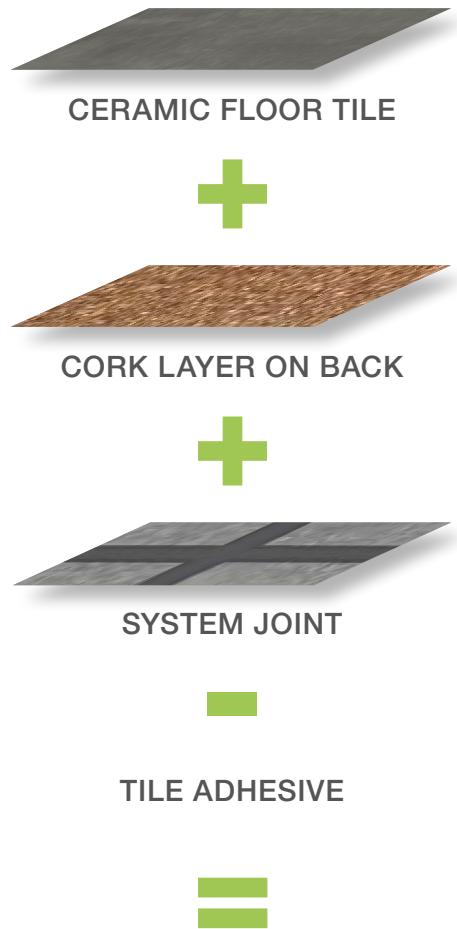

**DRY**  
**TILE**

One unique feature of DryTile is its specially-developed cork layer based on polyolefins. Free of PVC, chlorine and plasticizers, and even suitable for contact with food, it is generated thermally from a cork granulate under constant pressure and applied permanently to the back of the tile in a special process. This ensures that the tile is firmly suctioned to the floor. No mortar bed, no adhesive. We refer to this system as dry tiling.


The principle is ingeniously simple: the tile's inherent weight presses the cork layer onto the substrate where it adheres, vacuum-like, and guarantees that everything stays firmly in place. Enhanced by decoupling in the case of floating installation, cork also ensures improved impact sound insulation.

It goes without saying that the DryTile system also offers all of the advantages of ceramic tiles when compared to other floorings such as laminate or vinyl: they are absolutely light-fast, UV-resistant and odour-neutral; heavy furniture does not leave any pressure marks; they are non-flammable as well as being impervious to heat. These features make DryTile an ideal system for shop fitting, car showrooms, offices, hotels, museums, commercial buildings, schools and restaurants.

DryTile consulting and installation are provided exclusively by certified partners. Enabling us to guarantee the quality of installation and system function.



Cork granulate

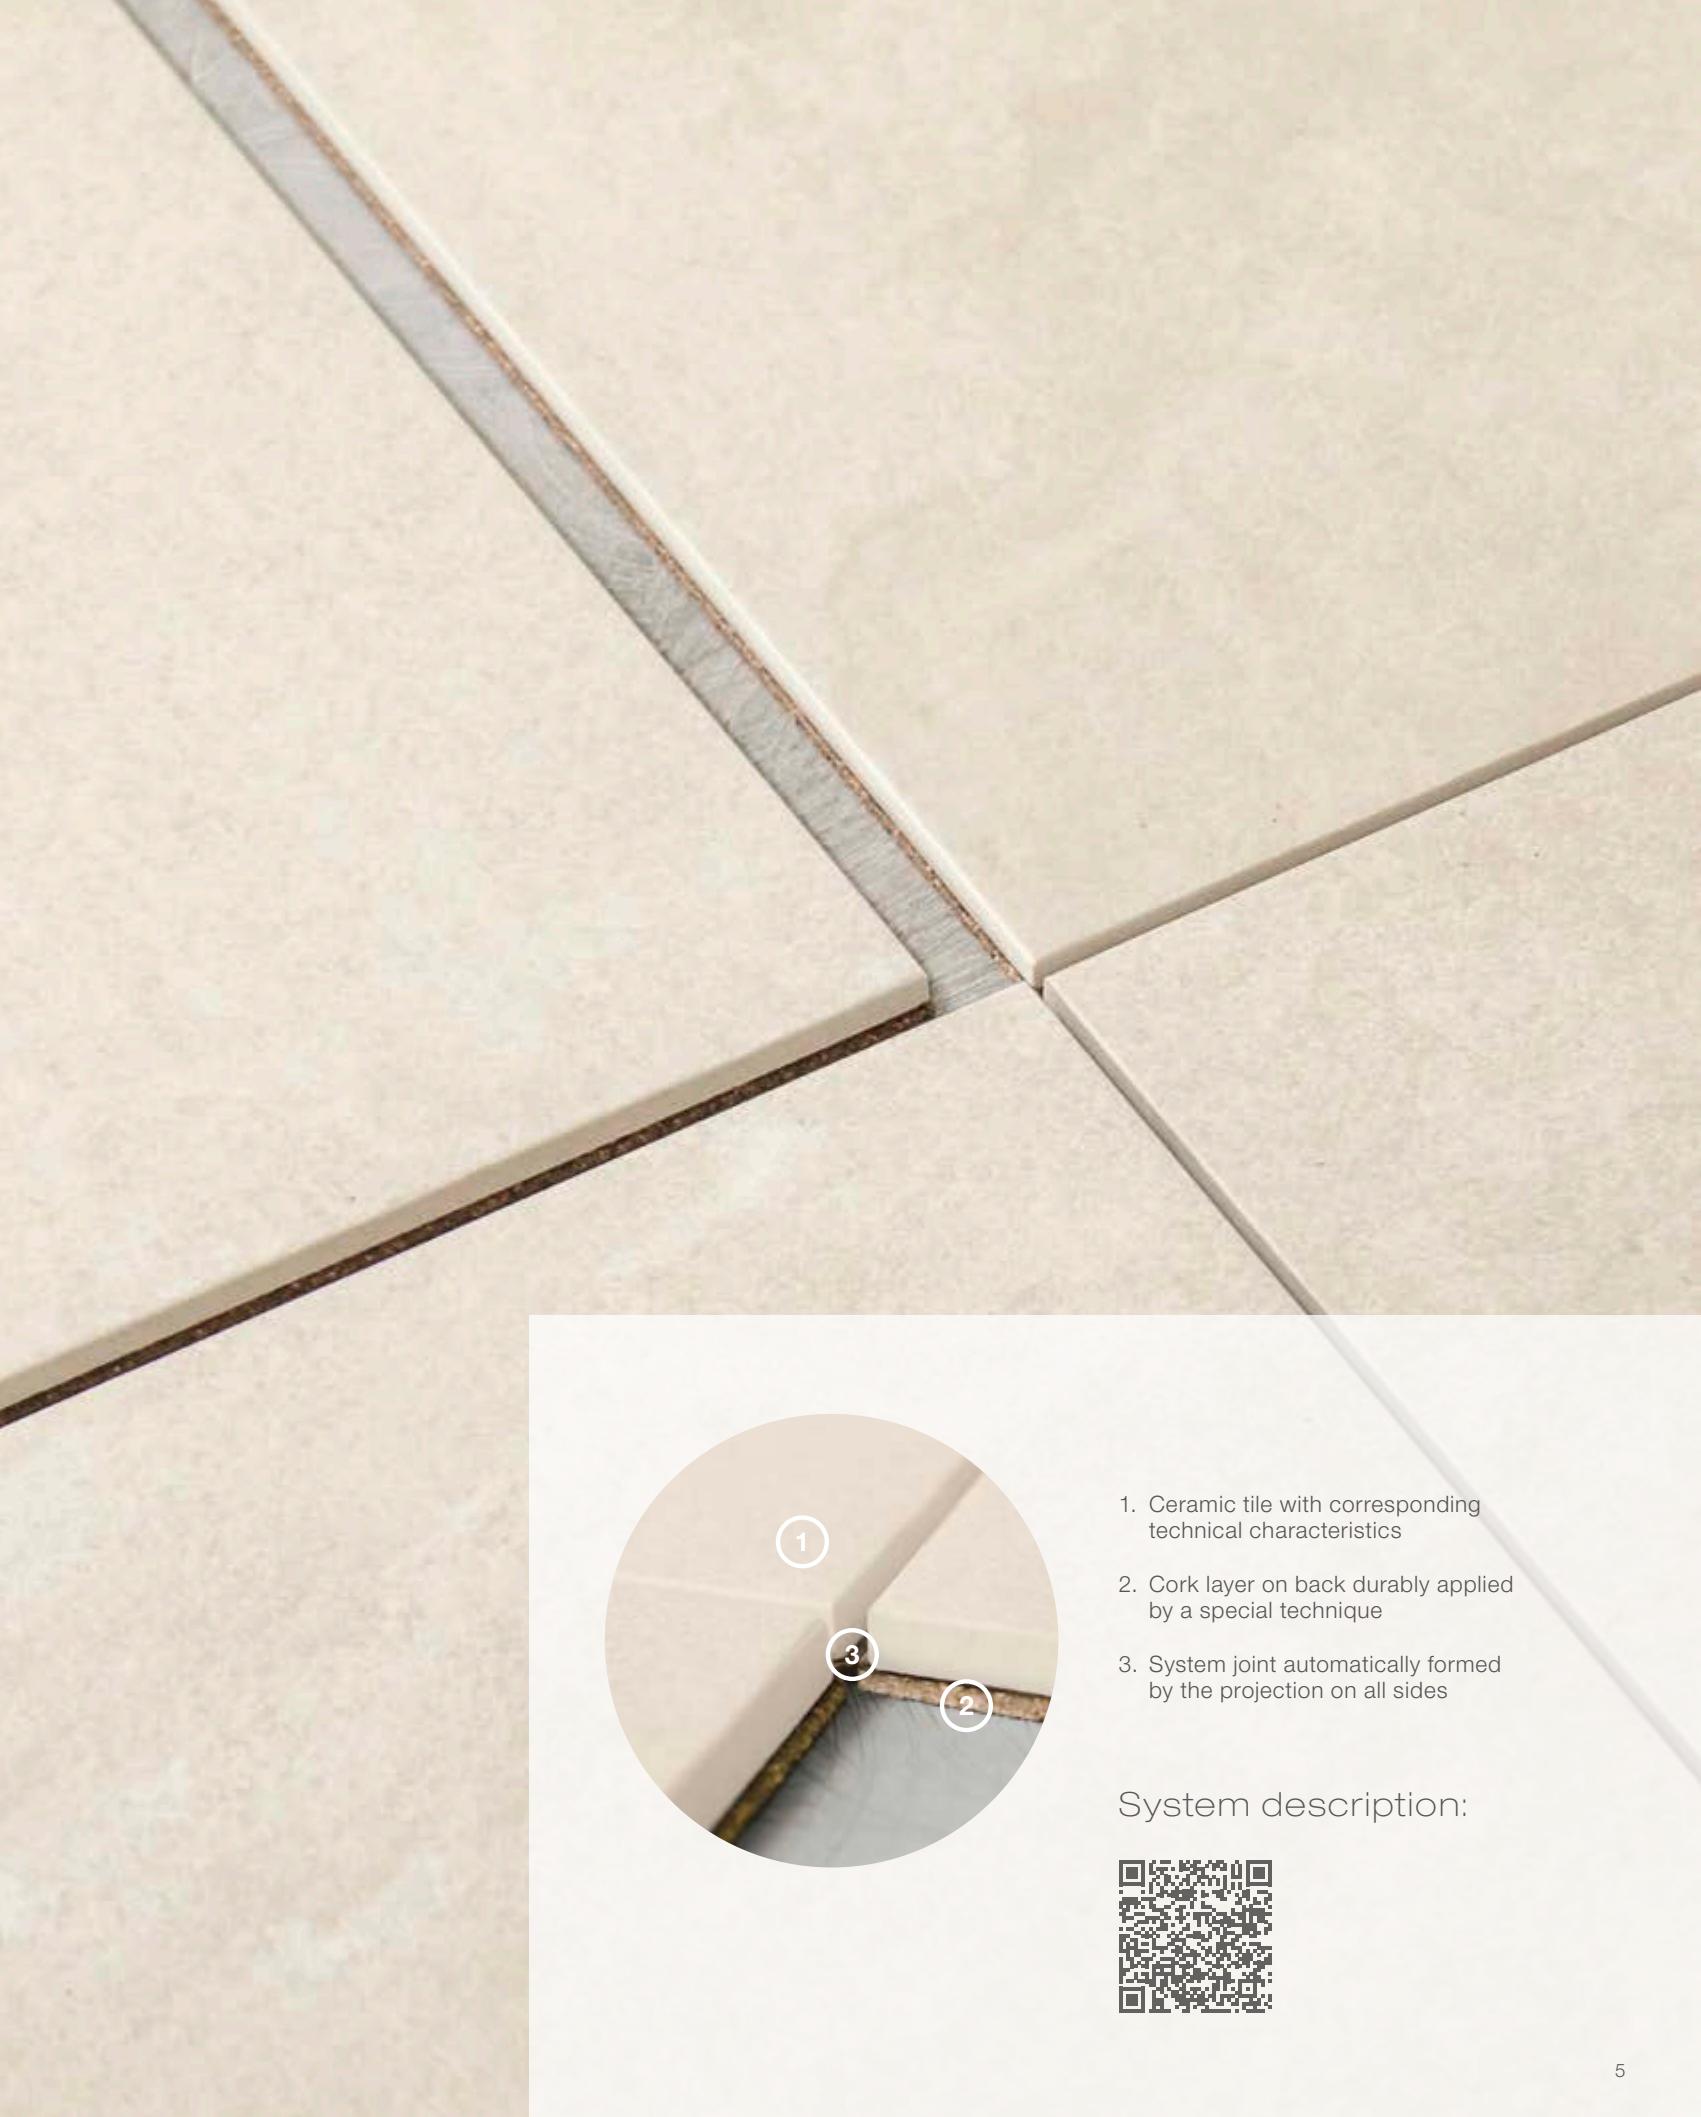

1. Ceramic tile with corresponding technical characteristics
2. Cork layer on back durably applied by a special technique
3. System joint automatically formed by the projection on all sides

System description:



# DryTile: so many advantages ...

## For building owners

### + Significantly shorter installation periods

DryTile is up to 8 times faster than classic tiling.

### + Entirely reversible at no great effort

If you wish to keep abreast of the latest trends in interior design or areas are subject to a change of use, you can swiftly and easily remove the tiles entirely reversibly and without any dust.

### + Easy repair of damaged tiles

Damaged tiles can be replaced within minutes. Joints are easily cut open, no drying times for tile adhesive – simply insert the new tile and regROUT.

## For craftsmen

### + Practically dust-free installation

Noise, dust and stress are irritating factors. DryTile system floors do not require any adhesive and installation is fast and smooth.

### + Minimising warranty claims

Constructive decoupling means that complaints based on underground movements are practically eliminated.

### + Tapping new areas of business

DryTile makes tiles fit for new areas of application and offers trade and craftsmen new impulses. Whether supermarkets, hotels or showrooms: DryTile offers flexibility and speed – and all of the advantages of a robust tile surface. Make the most of these opportunities: become a DryTile partner!



## For architects

### + Parallel planning of tasks


DryTile system floors can be walked on immediately, enabling the continuation of other tasks such as electrical installation, painting or drywall work, practically without interruption.

### + Easy planning


The only prerequisite for DryTile is a sufficiently smooth subsurface (inside micrometre 2 mm on 2 m length). "Visible" planning, and not according to rigidly specified separating joints and minimum clearances.

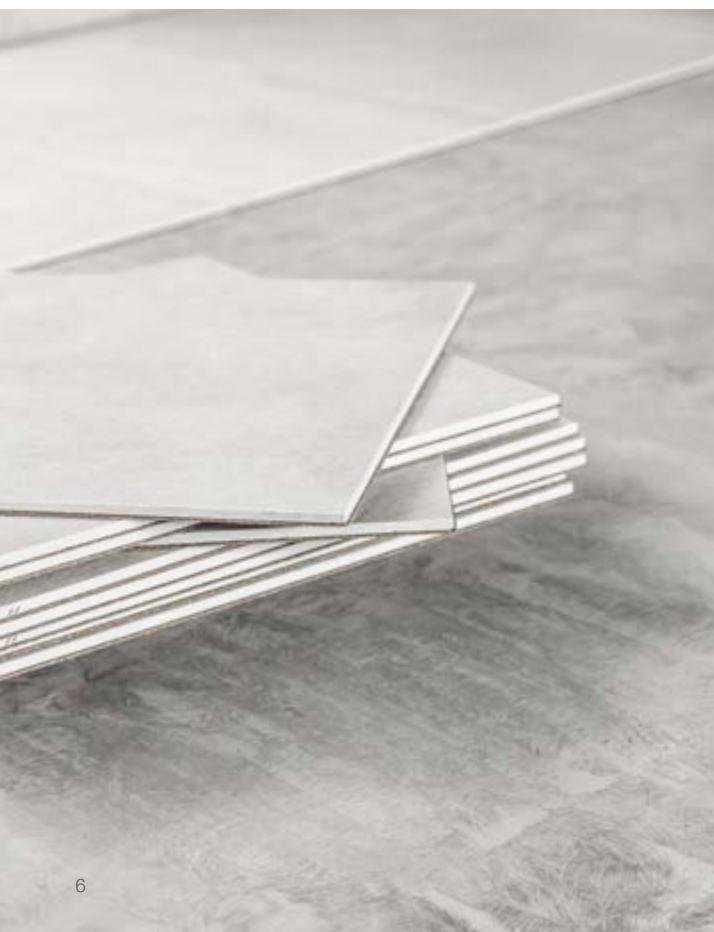


Easy installation




Emission-free




Incurs little waste




Recyclable




Impact-proof



Low-flammable



Color-fast



Suitable for  
underfloor heating



Tested product



It's all about stories / Limbecker Platz, Essen, Germany

# Installation: fast, faster, finished.

## Check for planarity

The only prerequisite for laying DryTile system floors is a sufficiently smooth subsurface exceeding the surface evenness tolerances according to DIN 18202. An inside micrometre of 2 mm on a length of 2 m must be maintained. Prior to installation, the subsurface must be examined for evenness and surface quality using the appropriate measuring instruments. The dimensional accuracy and evenness of the laying surface must comply with that of the finished covered area. This can be achieved by means of full-surface levelling.

## Specify joint grid

DryTile system floors can be installed in any standard joint grid. The slim and precise system joint is automatically achieved by laying the cork edges tightly against each other.

## Grout tiles


DryTile tiles are grouted using special dispersion joint mortar immediately after installation, if possible, whereby the enclosed manufacturer's installation instructions concerning the mixing ratio with water must be observed.

The surface can be walked on after 12 hours and displays full resistance after 24 hours.

## Technical data and approvals

- Own CE marking
- Building inspection approval: DIBt approval number Z-156.610-1373
- Emission-tested construction product in accordance with DIBt principles
- Fire performance: flame-retardant class Bfl-s1 as per DIN EN 13501-1 on solid mineral subsurfaces (gross density  $\geq 1350 \text{ kg/m}^3$ ) and on subsurfaces made of wood and wood materials (thickness  $\geq 10 \text{ mm}$ , gross density  $\geq 475 \text{ kg/m}^3$ )
- Acoustic and constructive decoupling from the subsurface (up to 13 dB\* impact sound reduction value as per ITA Wiesbaden test)
- Disposal (tile incl. cork layer and system joint mass) as per waste code 170904 (DK1 landfill)

\*Test value acc. to DIN EN ISO 10140. The impact sound reduction actually achieved should be established by trial laying and measurement on site.

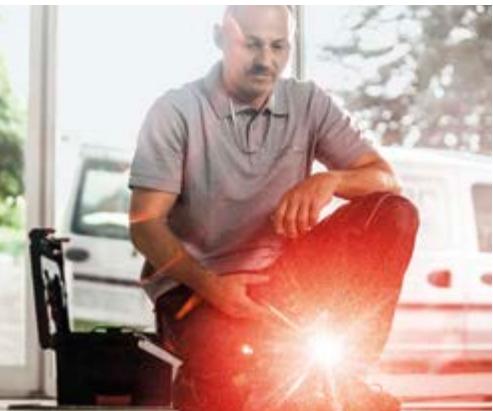

1 Examine planarity using the appropriate measuring instruments.



2 Rework the floor if necessary in order to ensure the requirements on evenness.



3 Specify the joint grid and lay the cork edges tightly against each other.



4 Grout the tiles using special system grout mortar. Ensure the correct mixing ratio of grout mortar and water as per manufacturer's instructions.



5 DryTile tiles can be easily replaced at any time. Simply cut open the joint, remove the tile with a suction lifter and insert the new tile.



Installation guideline:



# Innovative surface finishes



Exhibition lobby AGROB BUCHTAL GmbH, Alfter-Witterschlick, Germany

# HYTECT – THE HYGIENE TILE

**Hytect** tiles can make a significant contribution to a healthy room climate. After all, this innovative technology reduces bacteria, mould and germs, breaks down pollutants in the air, and ensures that dirt can be easily removed. **Hytect** acts like a natural catalyst whose effects are triggered simply by light – and permanently. After all, **Hytect** is inseparably and durably baked into the tile. For sustainably good quality of air.

## How the **Hytect** technology works


Titanium dioxide ( $TiO_2$ ) is fired insolubly and permanently into the ceramic surface at high temperatures. As a permanent catalyst, it facilitates a life-long reaction between light (photocatalysis), oxygen and humidity. This gives rise to activated oxygen and a hydrophilic, water-friendly ceramic surface. The activated oxygen undertakes three decisive functions:

- **Hytect** slows the growth of mould, bacteria and other microorganisms
- **Hytect** facilitates cleaning of the surface finish
- **Hytect** helps to break down indoor air pollutants such as formaldehyde and odours



### Easy to clean

Thanks to the **Hytect** surface, dirt is simply rinsed off. This reduces the effort involved in cleaning and the use of cleaning agents. Making it possible to concentrate on the good things in life while protecting the environment at the same time.

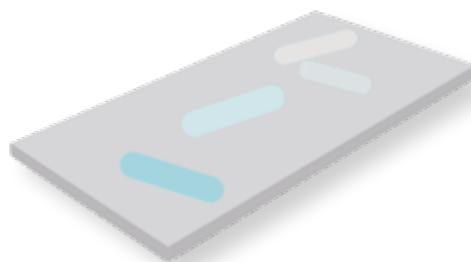

### Antibacterial effect

When **Hytect** interacts with light, oxygen is activated which breaks down microorganisms such as bacteria, mould and germs. The good feeling of having a home which protects us from germs

To the **Hytect** film:



More information:  
[www.hytect.com](http://www.hytect.com)

Renowned test institutes confirm the effects of **Hytect**.




### Improved room climate


**Hytect** triggers an air-purification process which neutralises both unpleasant odours and pollutants such as nitrogen oxides. Enabling every member of the family and guest to your home to breathe easily.

# PROTECTA-UPGRADED TILES

Unglazed vitrified tiles are hard-wearing and resistant by nature. Thanks to the Protecta surface upgrading, stain and dirt resistance could be improved considerably: during the firing process, the coating applied in-plant is ceramically bonded to the biscuit and closes the existing "micropores" quite natural for unglazed ceramics. In this way, the penetration of substances forming stains is prevented. Thus, an impregnation is no longer required and may possibly even have a negative effect in the case of slip-resistant tiles with Protecta surface upgrading, as the impregnating agent cannot penetrate the tile, but remains on the surface as a lubricating film.



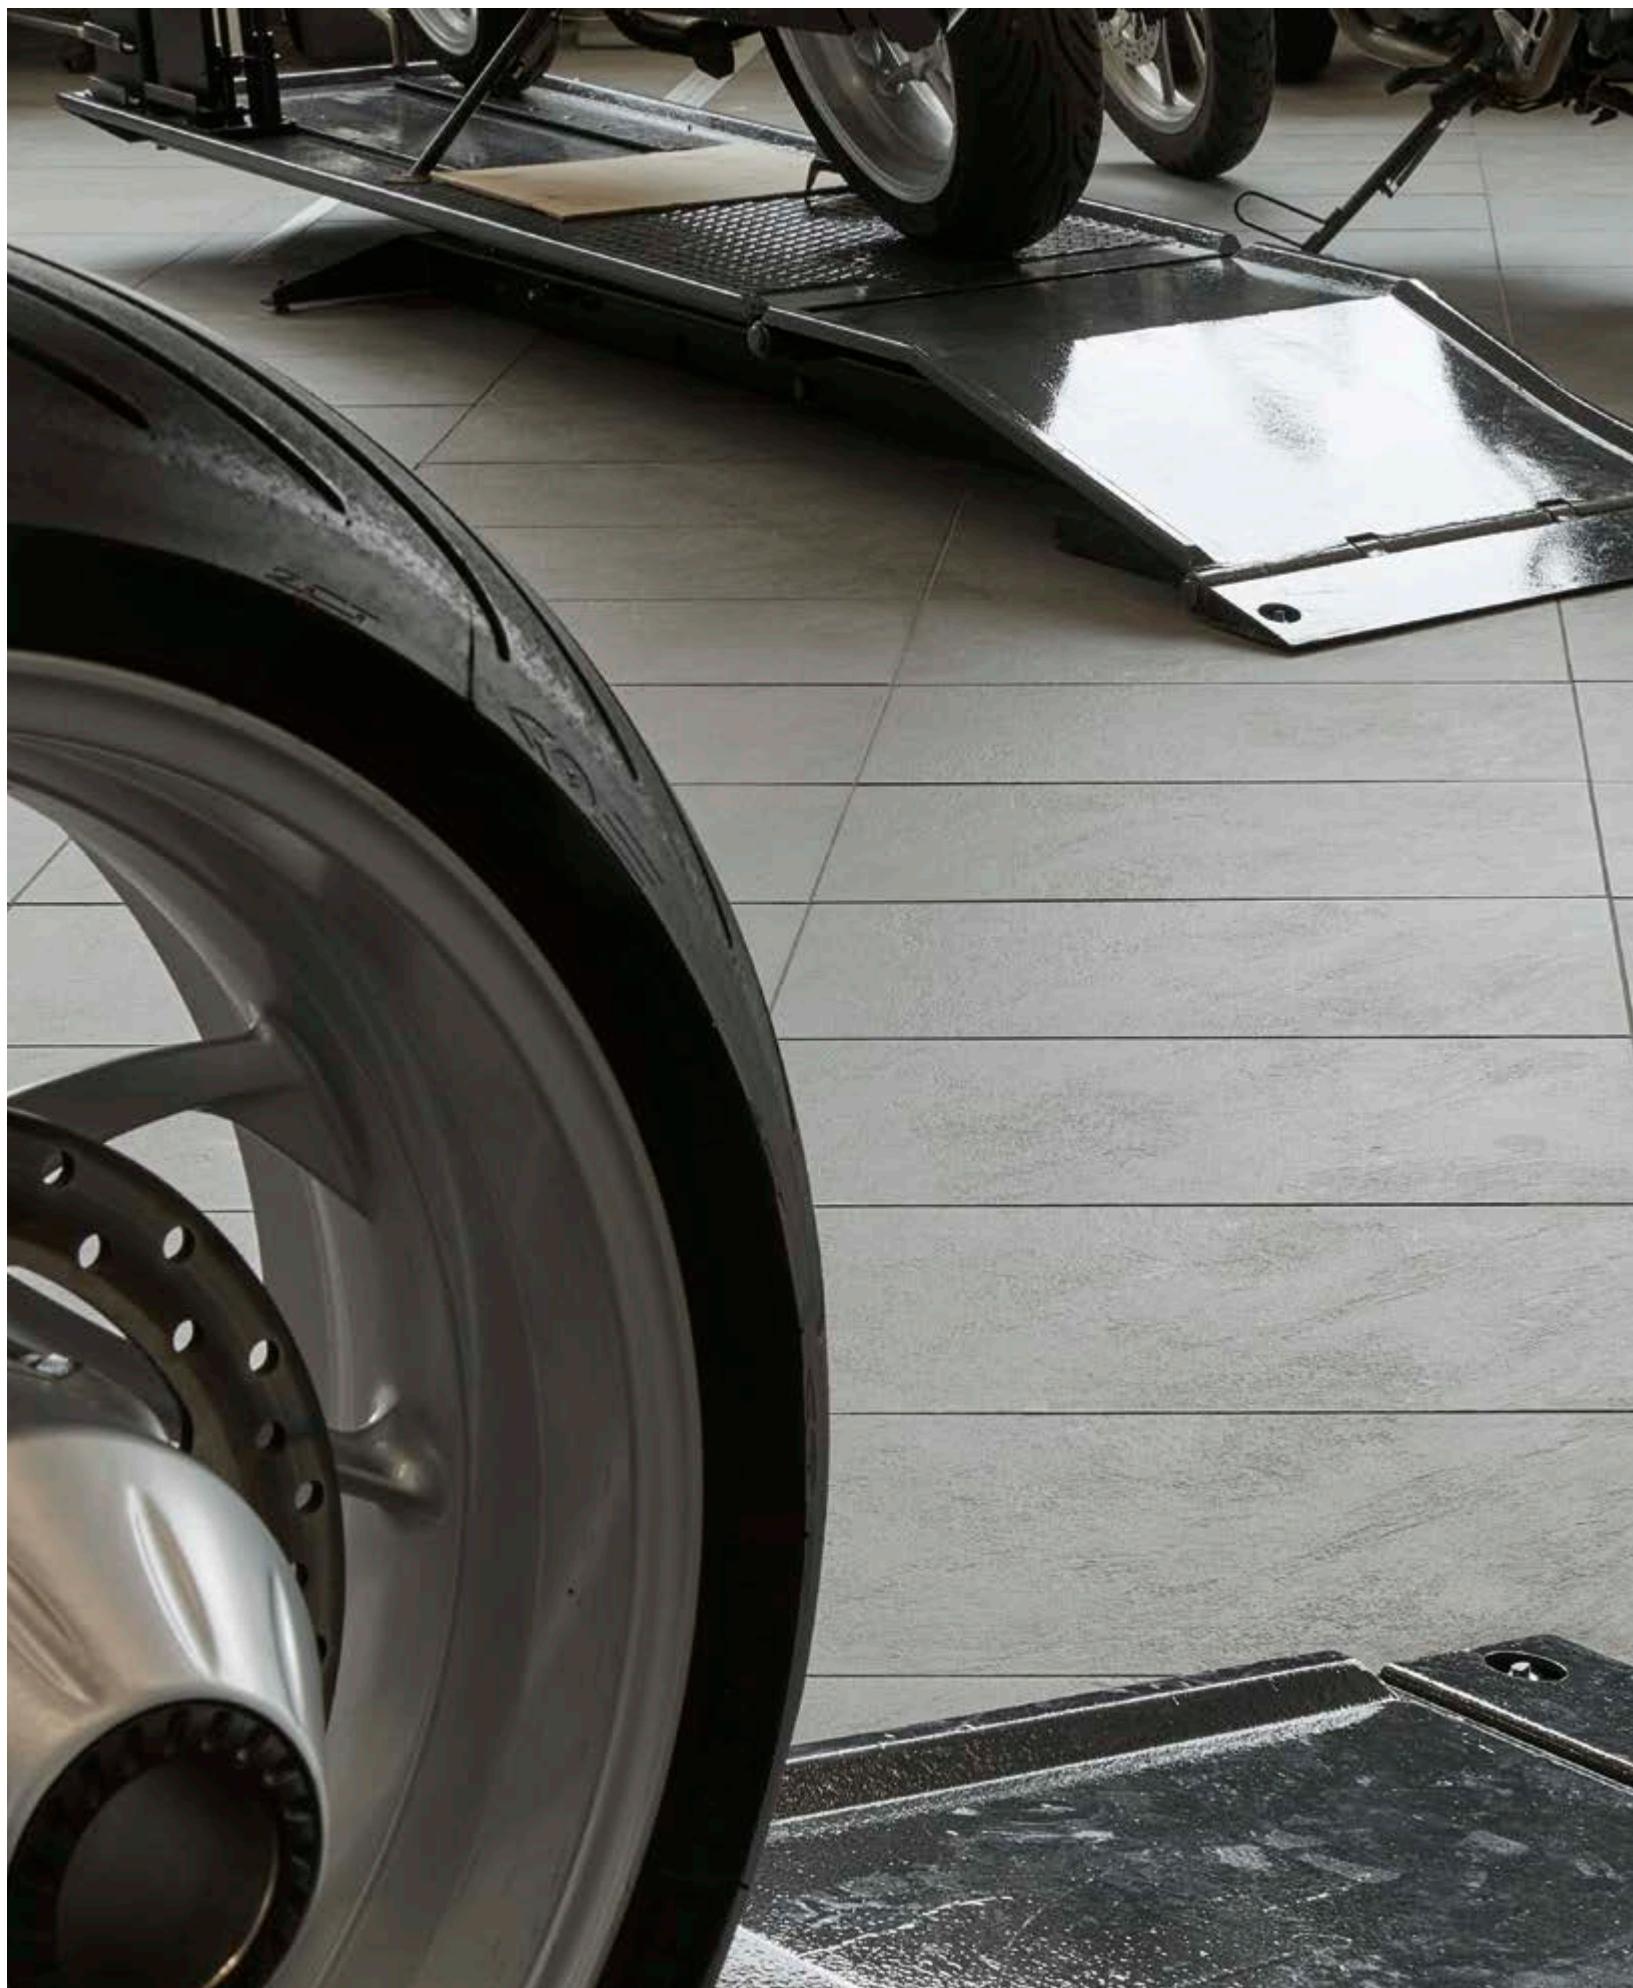

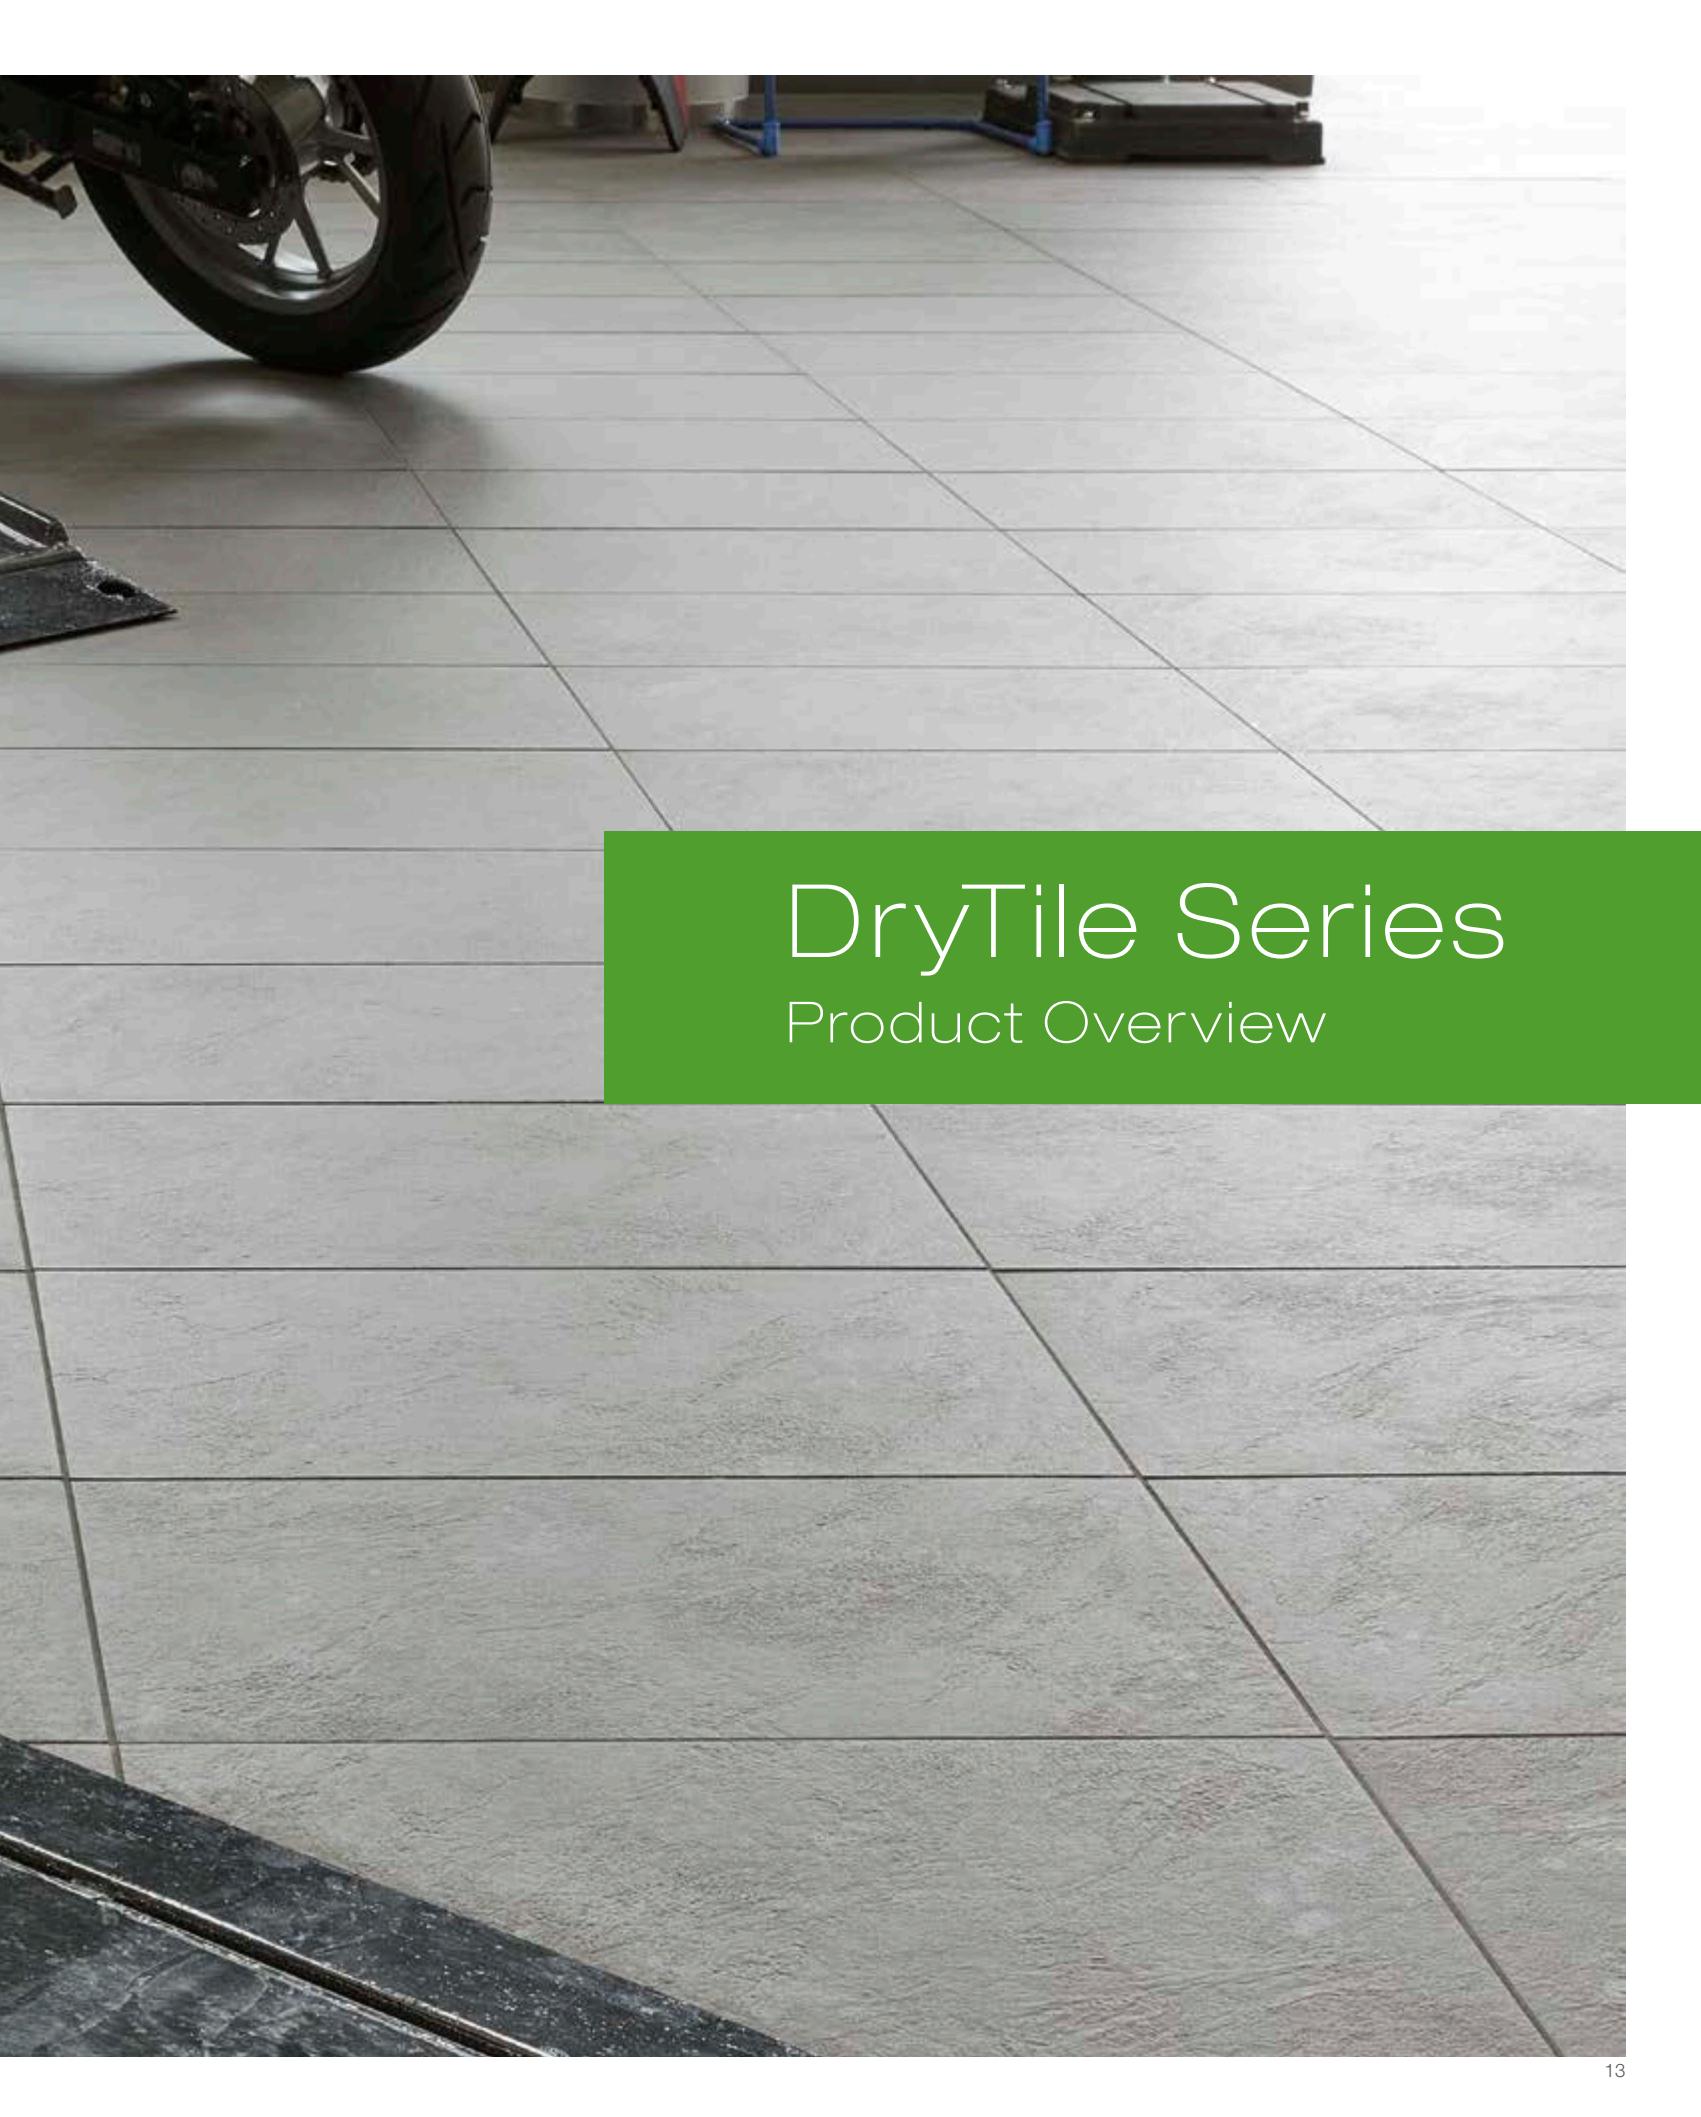

# DryTile Series

## Product Overview



## ALCINA



crema



clay-brown




pebble-grey



basalt



graphite



Nom. dim. - cm	30 x 60	60 x 60	45 x 90	90 x 90
Work size - mm	297 x 597 x 12.5	597 x 597 x 12.5	447 x 897 x 12.5	895 x 895 x 13
Slip resistance	R9	R9	R9	R9
m <sup>2</sup> / pieces	5,556	2,778	2,470	1,234
Pallet / pieces	200	100	80	40
Pallet - m <sup>2</sup>	35.997	35.997	32.389	32.415
Pallet - kg	886.400	906.000	792.560	845.720



crema **434816DT** **434821DT** **434831DT**



clay-brown **434817DT** **434822DT** **434832DT**



pebble-grey **434818DT** **434823DT** **434833DT** **434895DT**



basalt **434819DT** **434824DT** **434834DT** **434896DT**



graphite **434820DT** **434825DT** **434835DT** **434897DT**



### Skirting



Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10.5
m / pieces	1.667
Bundle / pieces	15
Bundle - m	8.998
Bundle - kg	14.250

crema **434826**

clay-brown **434827**

pebble-grey **434828**

basalt **434829**


graphite **434830**




## CEDRA




mud-brown

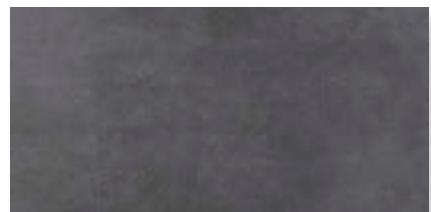

anthracite

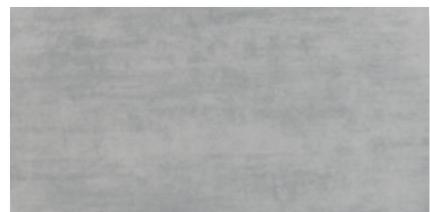

grey



Nom. dim. - cm	30 x 60	60 x 60	45 x 90
Work size - mm	297 x 597 x 12,5	597 x 597 x 12,5	447 x 897 x 12,5
Slip resistance	R9	R9	R9
m <sup>2</sup> / pieces	5,556	2,778	2,470
Pallet / pieces	200	100	80
Pallet - m <sup>2</sup>	35,997	35,997	32,389
Pallet - kg	886,400	906,000	792,560
mud-brown	<b>433694DT</b>	<b>434759DT</b>	<b>433739DT</b>
anthracite	<b>433692DT</b>	<b>434757DT</b>	<b>433737DT</b>
grey	<b>433693DT</b>	<b>434758DT</b>	<b>433738DT</b>

**Skirting**

Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10,5
m / Pieces	1,667
Bundle / Pieces	22
Bundle - m	13,197
Bundle - kg	20,900
mud-brown	<b>433697</b>
anthracite	<b>433695</b>
grey	<b>433696</b>




## EMOTION




deep anthracite




light-beige

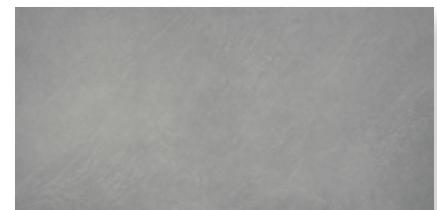

mid-grey

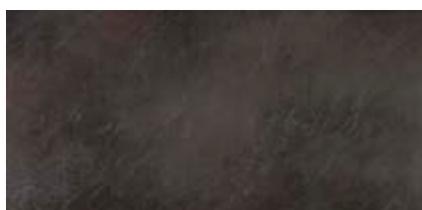


bronze

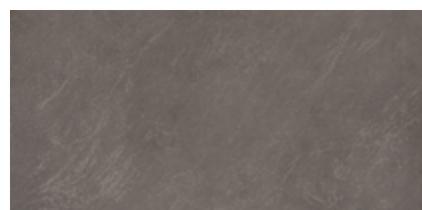

basalt



grey-brown



Nom. dim. - cm	30 x 60	30 x 60	60 x 60	60 x 60
Work size - mm	297 x 597 x 12,5	297 x 597 x 12,5	597 x 597 x 12,5	597 x 597 x 12,5
Slip resistance	R9	R10/A	R9	R10/A
m <sup>2</sup> / Pieces	5,556	5,556	2,778	2,778
Pallet / Pieces	200	200	100	100
Pallet - m <sup>2</sup>	35,997	35,997	35,997	35,997
Pallet - kg	886,400	886,400	906,000	906,000
deep anthracite	433402DT	433406DT	433660DT	433664DT
light-beige	433404DT	433408DT	433662DT	433666DT
mid-grey	433403DT	433407DT	433661DT	433665DT
bronze	433405DT	433409DT	433663DT	433668DT
basalt	433430DT	433432DT	433436DT	433438DT
grey-brown	433431DT	433433DT	433437DT	433439DT

**Skirting**


Nom. dim. - cm	7 x 60	7 x 60
Work size - mm	70 x 597 x 12,5	70 x 597 x 12,5
Surface	smooth	structured
m / Pieces	1,667	1,667
Bundle / Pieces	22	22
Bundle - m	13,197	13,197
Bundle - kg	22,660	22,660
deep anthracite	433802	433806
light-beige	433804	433808
mid-grey	433803	433807
bronze	433805	433809
basalt	433821	433823
grey-brown	433822	433824




## EVALIA



grey

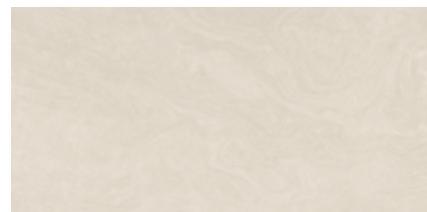

beige

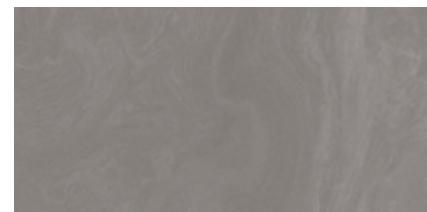

anthracite

**Skirting**

Nom. dim. - cm	60 x 60	45 x 90
Work size - mm	595 x 595 x 12	446 x 895 x 12
Slip resistance	R9	R9
m <sup>2</sup> / Pieces	2,778	2,470
Pallet / Pieces	100	80
Pallet - m <sup>2</sup>	35,997	32,389
Pallet - kg	850,40	845,360

Nom. dim. - cm	7 x 60
Work size - mm	70 x 595 x 10
Slip resistance	
m / Pieces	1,667
Bundle / Pieces	15
Bundle - m	8,998
Bundle - kg	13,920



grey                   **431913DT**

**431916DT**

grey                   **431920**



beige               **431914DT**

**431917DT**

beige               **431921**



anthracite       **431915DT**

**431918DT**

anthracite       **431922**





## GEO 2.0



anthracite



stone-grey



mud-brown



Nom. dim. - cm	30 x 60
Work size - mm	297 x 597 x 12,5
Slip resistance	R10/A
m <sup>2</sup> / Pieces	5,556
Pallet / Pieces	200
Pallet - m <sup>2</sup>	35,997
Pallet - kg	886,400



anthracite                   **432837DT**


stone-grey                  **433911DT**

mud-brown                 **433912DT**






## KIANO

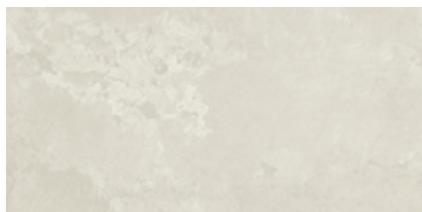

ivory-white

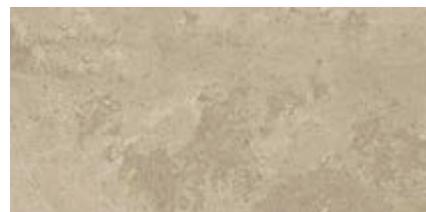

sahara beige



atlas grey



coal-black

**Skirting**

Nom. dim. - cm	30 x 60	60 x 60
Work size - mm	297 x 597 x 12,5	597 x 597 x 12,5
Slip resistance	R10/A	R10/A
m <sup>2</sup> / Pieces	5,556	2,778
Pallet / Pieces	200	100
Pallet - m <sup>2</sup>	35,997	35,997
Pallet - kg	886,400	886,400

Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10,5
Slip resistance	
m / Pieces	1,667
Bundle / Pieces	22
Bundle - m	13,197
Bundle - kg	22,660



ivory-white      **431930DT**

**431934DT**


ivory-white      **431942**



sahara beige      **431931DT**

**431935DT**

sahara beige      **431943**



atlas grey      **431932DT**

**431936DT**

atlas grey      **431944**




coal-black      **431933DT**

**431937DT**

coal-black      **431945**



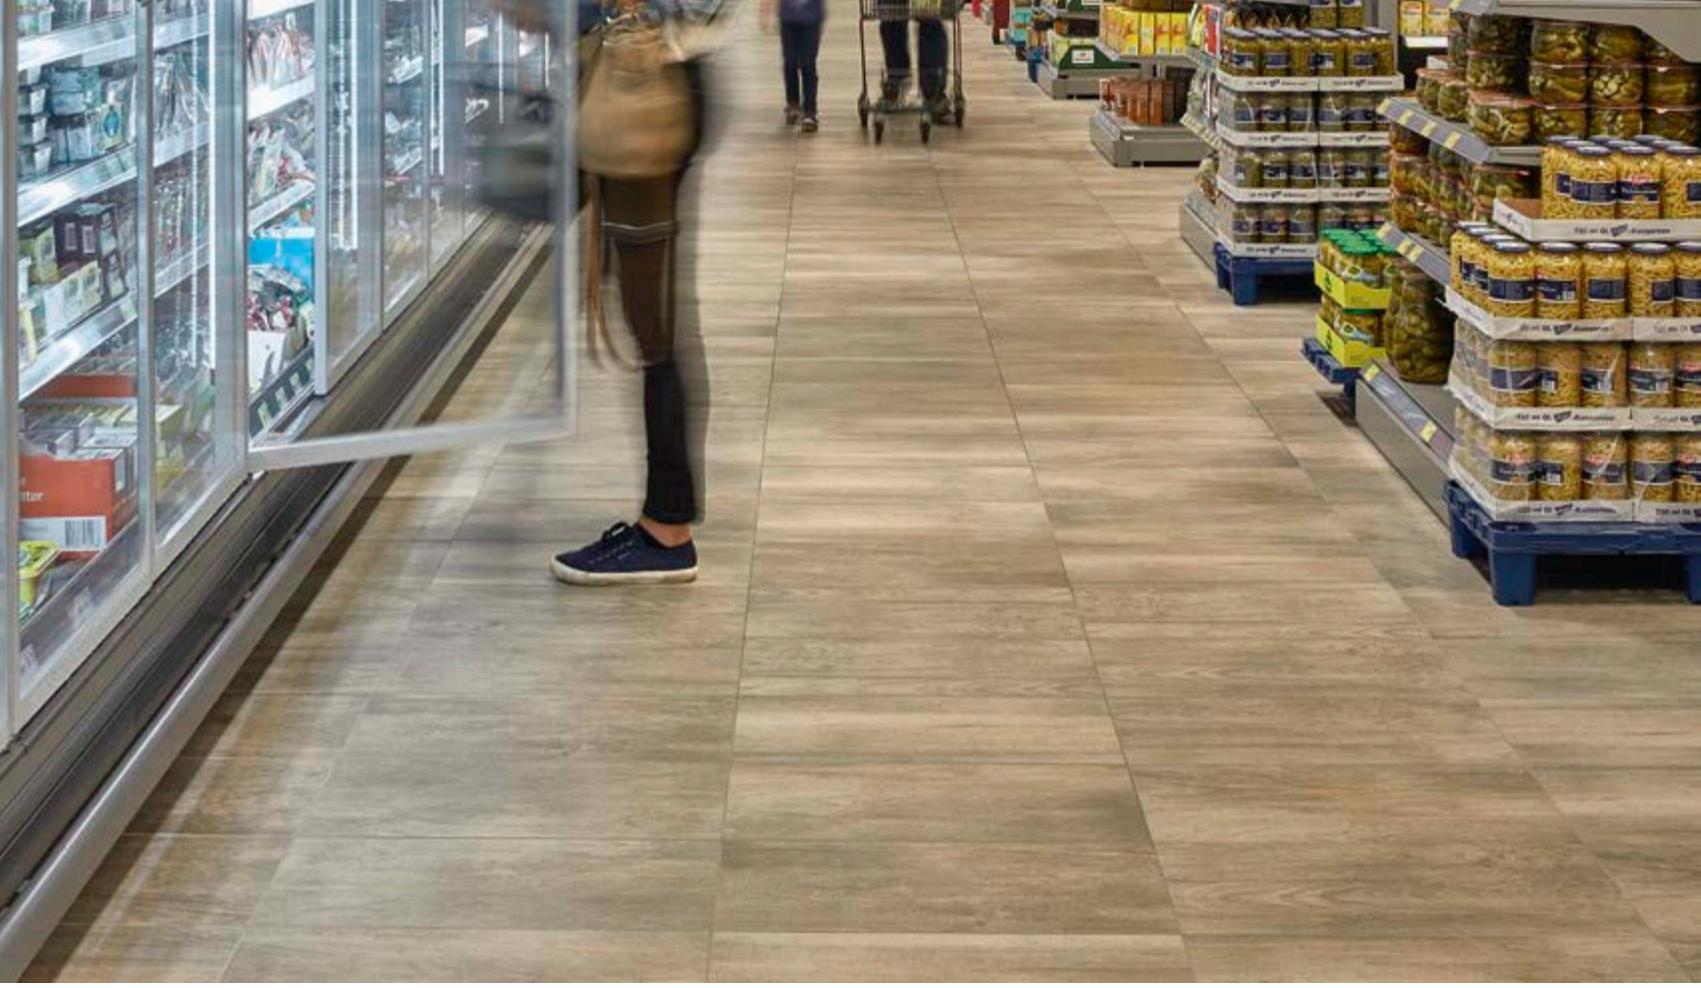

## MANDALAY



smoky-brown



white-grey



light-brown



black-brown



Nom. dim. - cm	30 x 60	15 x 90	45 x 90
Work size - mm	297 x 597 x 12,5	147 x 597 x 12,5	447 x 897 x 12,5
Slip resistance	R10/A	R10/A	R10/A
m <sup>2</sup> / Pieces	5,556	7,407	2,470
Pallet / Pieces	200	280	80
Pallet - m <sup>2</sup>	35,997	37,802	32,389
Pallet - kg	886,400	924,560	792,560
smoky-brown	<b>434480DT</b>	<b>434496DT</b>	<b>434488DT</b>
white-grey	<b>434478DT</b>	<b>434494DT</b>	<b>434486DT</b>
light-brown	<b>434479DT</b>	<b>434495DT</b>	<b>434487DT</b>
black-brown	<b>434481DT</b>	<b>434497DT</b>	<b>434489DT</b>



protected

**Skirting**

Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10,5
m / Pieces	1,667
Bundle / Pieces	15
Bundle - m	8,998
Bundle - kg	14,250
smoky-brown	<b>434508</b>
white-grey	<b>434506</b>
light-brown	<b>434507</b>
black-brown	<b>434509</b>




## NOVA




cream-beige




mid-brown

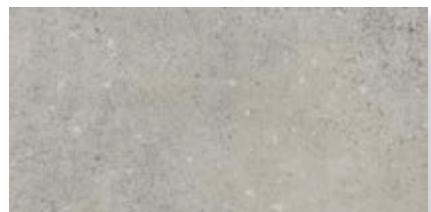

mid-grey

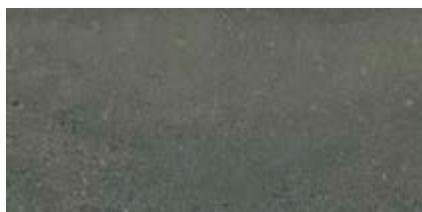

basalt

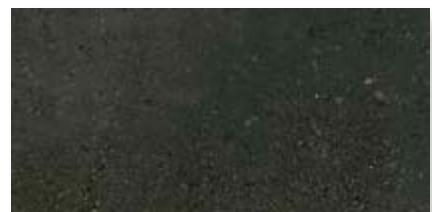

anthracite



anthracite-multicolored



Nom. dim. - cm	30 x 60	60 x 60	60 x 120
Work size - mm	297 x 597 x 12,5	597 x 597 x 12,5	597 x 1197 x 12,5
Slip resistance	R10/A	R10/A	R10/A
m <sup>2</sup> / Pieces	5,556	2,778	1,388
Pallet / Pieces	200	100	50
Pallet - m <sup>2</sup>	35,997	35,997	36,023
Pallet - kg	886,400	906,000	907,950



cream-beige

431829HDT

431840HDT

431846HDT

mid-brown

431830HDT

431841HDT

431847HDT

mid-grey

431831HDT

431842HDT

431848HDT

basalt

431832HDT

431843HDT

431849HDT

anthracite

431833HDT

431844HDT

431850HDT

anthracite-multicolored

431834HDT

431845HDT


431851HDT

**Skirting**

Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10,5
m / Pieces	1,667
Bundle / Pieces	15
Bundle - m	8,998
Bundle - kg	14,250
cream-beige	431864H
mid-brown	431865H
mid-grey	431866H
basalt	431867H
anthracite	431868H
anthracite-multicolored	431869H



## PIZARRO

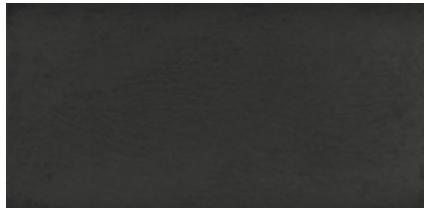

black



natural-white



anthracite




Nom. dim. - cm	30 x 60
Work size - mm	297 x 597 x 12,5
Slip resistance	R10
m <sup>2</sup> / Pieces	5,556
Pallet / Pieces	200
Pallet - m <sup>2</sup>	35,997
Pallet - kg	886,400

	black	433652DT
	natural-white	433650DT
	anthracite	433651DT






## REMIX

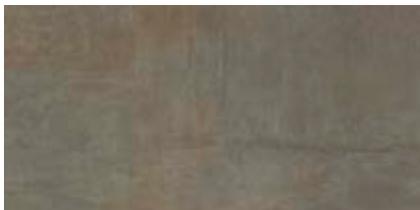

brown

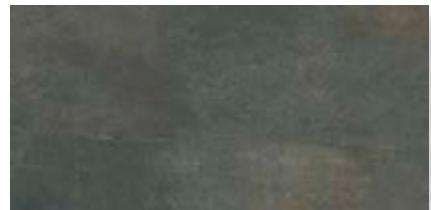

anthracite



grey



beige



Nom. dim. - cm	15 x 90	22,5 x 90	45 x 90
Work size - mm	147 x 897 x 12,5	222 x 897 x 12,5	447 x 897 x 12,5
Slip resistance	R10/A	R10/A	R10/A
m <sup>2</sup> / Pieces	7,407	4,938	2,470
Pallet / Pieces	280	200	80
Pallet - m <sup>2</sup>	37,802	40,502	32,389
Pallet - kg	924,560	990,800	792,560

brown	434590DT	434586DT	434582DT
anthracite	434587DT	434583DT	434579DT
grey	434588DT	434584DT	434580DT
beige	434589DT	434585DT	434581DT

**Skirting**


Nom. dim. - cm	7 x 90
Work size - mm	70 x 897 x 10,5
m / Pieces	1,111
Bundle / Pieces	8
Bundle - m	7,200
Bundle - kg	12,320
brown	434602
anthracite	434599
grey	434600
beige	434601



## SIERRA




light-grey

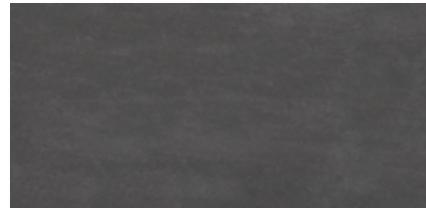

anthracite



light-beige

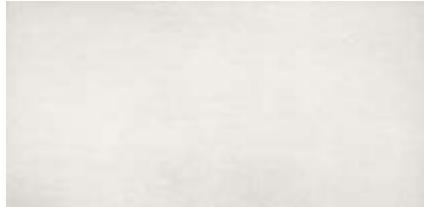

white

**Skirting**

Nom. dim. - cm	30 x 60
Work size - mm	297 x 597 x 12,5
Slip resistance	R9
m <sup>2</sup> / Pieces	5,556
Pallet / Pieces	200
Pallet - m <sup>2</sup>	35,997
Pallet - kg	886,400

	light-grey	059800DT
	anthracite	059703DT
	light-beige	059801DT
	white	059805DT

Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10,5
Slip resistance	
m / Pieces	1,667
Bundle / Pieces	22
Bundle - m	13,197
Bundle - kg	20,900

	light-grey	059813
	anthracite	059741
	light-beige	059814
	white	059816





## SOMERO




grey




beige




mud

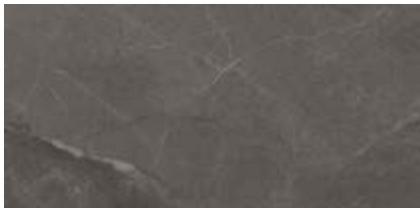

anthracite

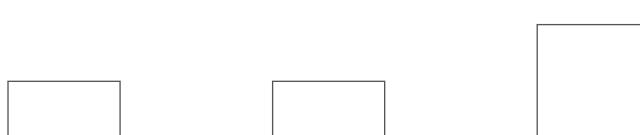

Nom. dim. - cm	30 x 60	30 x 60	60 x 60
Work size - mm	297 x 597 x 12,5	297 x 597 x 12,5	597 x 597 x 12,5
Slip resistance	R9	R10/A	R10/A
m <sup>2</sup> / Pieces	5,556	5,556	2,778
Pallet / Pieces	200	200	100
Pallet - m <sup>2</sup>	35,997	35,997	35,997
Pallet - kg	886,400	886,400	906,000
grey	434621DT	434625DT	434629DT
beige	434620DT	434624DT	434628DT
mud	434622DT	434626DT	434630DT
anthracite	434623DT	434627DT	434631DT

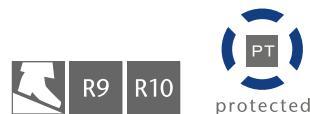**Skirting**

Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10,5
m / Pieces	1,667
Bundle / Pieces	15
Bundle - m	8,998
Bundle - kg	14,250
grey	434649
beige	434648
mud	434650
anthracite	434651



## SOUL




brown




anthracite



basalt

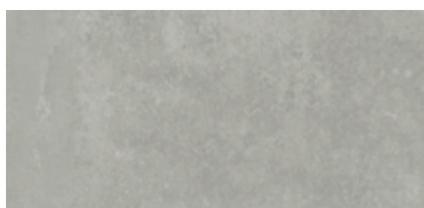

cement-grey

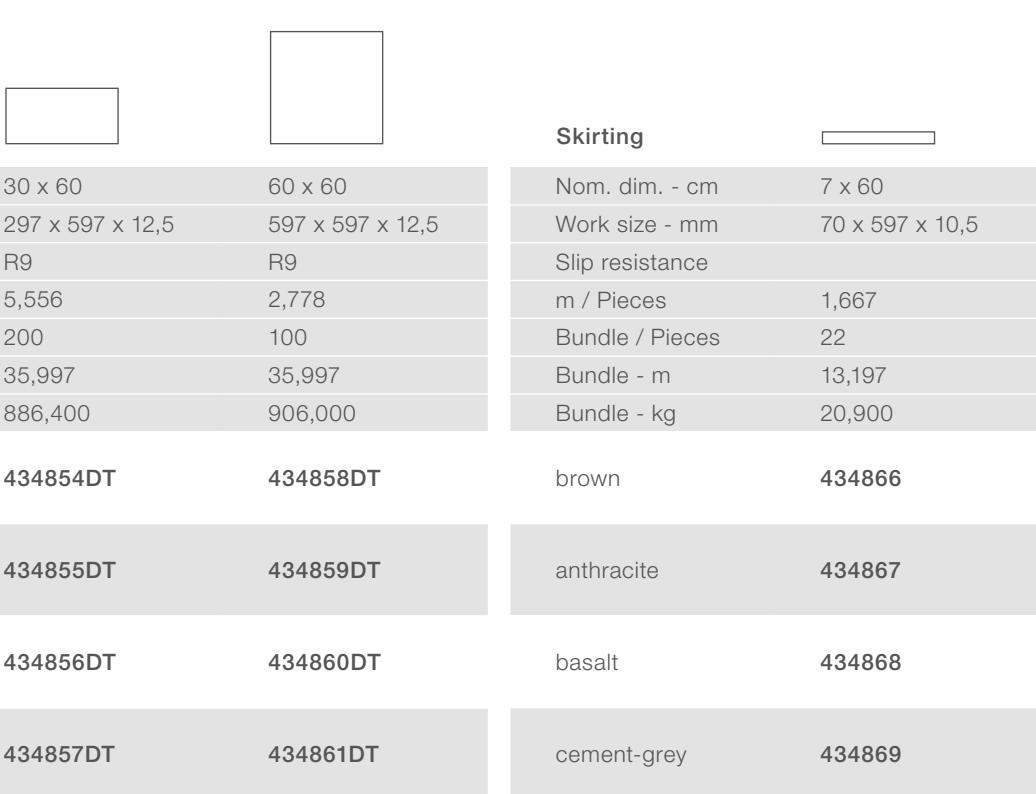

Nom. dim. - cm	30 x 60	60 x 60	Nom. dim. - cm	7 x 60
Work size - mm	297 x 597 x 12,5	597 x 597 x 12,5	Work size - mm	70 x 597 x 10,5
Slip resistance	R9	R9	Slip resistance	
m <sup>2</sup> / Pieces	5,556	2,778	m / Pieces	1,667
Pallet / Pieces	200	100	Bundle / Pieces	22
Pallet - m <sup>2</sup>	35,997	35,997	Bundle - m	13,197
Pallet - kg	886,400	906,000	Bundle - kg	20,900
brown	<b>434854DT</b>	<b>434858DT</b>	brown	<b>434866</b>
anthracite	<b>434855DT</b>	<b>434859DT</b>	anthracite	<b>434867</b>
basalt	<b>434856DT</b>	<b>434860DT</b>	basalt	<b>434868</b>
cement-grey	<b>434857DT</b>	<b>434861DT</b>	cement-grey	<b>434869</b>





## STORIES



ivory



concrete



sepia



anthracite




Nom. dim. - cm	30 x 60	60 x 60	Skirting	
Work size - mm	297 x 597 x 12,5	597 x 597 x 12,5		
Slip resistance	R10/A	R10/A		
m <sup>2</sup> / Pieces	5,556	2,778		
Pallet / Pieces	200	100		
Pallet - m <sup>2</sup>	35,997	35,997		
Pallet - kg	886,400	906,000		
ivory	<b>432315HDT</b>	<b>432319HDT</b>	ivory	<b>432327H</b>
concrete	<b>432316HDT</b>	<b>432320HDT</b>	concrete	<b>432328H</b>
sepia	<b>432317HDT</b>	<b>432321HDT</b>	sepia	<b>432329H</b>
anthracite	<b>432318HDT</b>	<b>432322HDT</b>	anthracite	<b>432330H</b>






## STREETLIFE

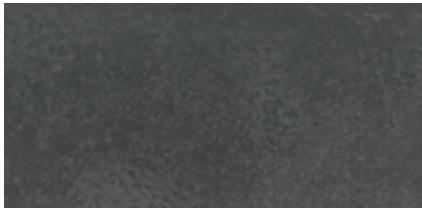

asphalt

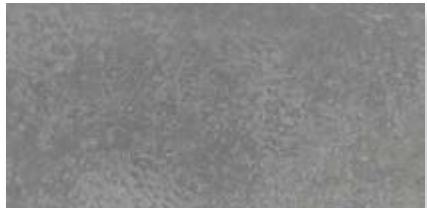

basalt



cement



rust

**Skirting**

Nom. dim. - cm	60 x 60	60 x 120	Nom. dim. - cm	6 x 60
Work size - mm	597 x 597 x 12,5	597 x 1197 x 12,5	Work size - mm	6 x 597 x 10,5
Slip resistance	R10	R10	Slip resistance	
m <sup>2</sup> / Pieces	2,778	1,390	m / Pieces	1,667
Pallet / Pieces	100	50	Bundle / Pieces	24
Pallet - m <sup>2</sup>	35,997	36,023	Bundle - m	14,397
Pallet - kg	890,400	907,950	Bundle - kg	20,808
asphalt	<b>8820-B700HKDT</b>	<b>8820-B770HKDT</b>	asphalt	<b>8820-B710HK</b>
basalt	<b>8821-B700HKDT</b>	<b>8821-B770HKDT</b>	basalt	<b>8821-B710HK</b>
cement	<b>8822-B700HKDT</b>	<b>8822-B770HKDT</b>	cement	<b>8822-B710HK</b>
rust	<b>8823-B700HKDT</b>	<b>8823-B770HKDT</b>	rust	<b>8823-B710HK</b>






## TIMELESS



sand



pebble-grey

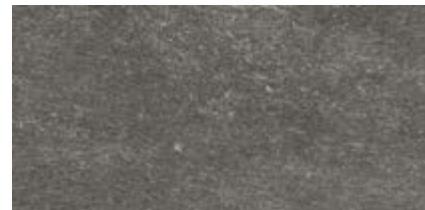

black



Nom. dim. - cm	30 x 60	60 x 60	60 x 120
Work size - mm	297 x 597 x 12,5	597 x 597 x 12,5	297 x 1197 x 12,5
Slip resistance	R10/B	R10/B	R10/B
m <sup>2</sup> / Pieces	5,556	2,778	1,388
Pallet / Pieces	200	100	50
Pallet - m <sup>2</sup>	35,997	35,997	36,023
Pallet - kg	886,400	906,000	907,950
sand	432086HDT	432089HDT	432092HDT
pebble-grey	432087HDT	432090HDT	432093HDT
black	432088HDT	432091HDT	432094HDT

**Skirting**

Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10,5
m / Pieces	1,667
Bundle / Pieces	15
Bundle - m	8,998
Bundle - kg	14,250
sand	432095H
pebble-grey	432096H
black	432097H



## TRIAS




iron ore




calcite-white



zinc-grey

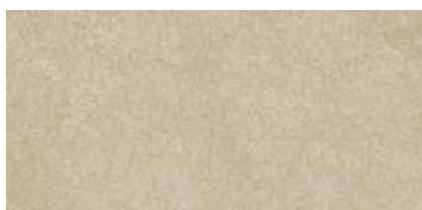

sand-yellow

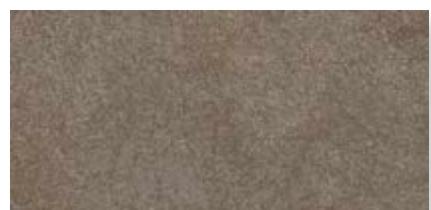

earth-brown


**Skirting**

Nom. dim. - cm	30 x 60	60 x 60	Nom. dim. - cm	7 x 60
Work size - mm	297 x 596 x 12	596 x 596 x 12	Work size - mm	70 x 596 x 10
Slip resistance	R10/A	R10/A	Slip resistance	
m <sup>2</sup> / Pieces	5,556	2,778	m / Pieces	1,667
Pallet / Pieces	200	100	Bundle / Pieces	22
Pallet - m <sup>2</sup>	35,997	35,997	Bundle - m	13,197
Pallet - kg	870,400	870,400	Bundle - kg	20,460

iron ore      **052227DT****052242DT**iron ore      **052247**calcite-white      **052225DT****052240DT**calcite-white      **052245**zinc-grey      **052226DT****052241DT**zinc-grey      **052246**sand-yellow      **052228DT****052243DT**sand-yellow      **052248**earth-brown      **052229DT****052244DT**earth-brown      **052249**




## UNIQUE

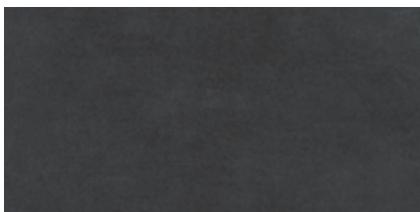

anthracite



basalt

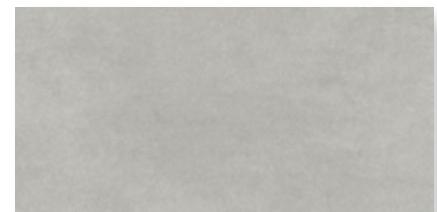

light-grey




beige



mud-brown



dark-brown

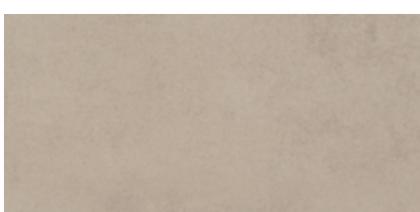

brown



lime




Nom. dim. - cm	30 x 60	60 x 60	Skirting	
Work size - mm	297 x 597 x 12,5	597 x 597 x 12,5		
Slip resistance	R10/A	R10/A		
m <sup>2</sup> / Pieces	5,556	2,778		
Pallet / Pieces	200	100		
Pallet - m <sup>2</sup>	35,997	35,997		
Pallet - kg	886,400	890,400		
anthracite	<b>433671DT</b>	<b>433701DT</b>	anthracite	<b>433685</b>
basalt	<b>433672DT</b>	<b>433702DT</b>	basalt	<b>433686</b>
light-grey	<b>433673DT</b>	<b>433703DT</b>	light-grey	<b>433687</b>
beige	<b>433674DT</b>	<b>433704DT</b>	beige	<b>433688</b>
mud-brown	<b>433675DT</b>	<b>433705DT</b>	mud-brown	<b>433689</b>
dark-brown	<b>433676DT</b>	<b>433706DT</b>	dark-brown	<b>433690</b>
brown	<b>433677DT</b>	<b>433707DT</b>	brown	<b>433691</b>
lime	<b>433698DT</b>	<b>433708DT</b>	lime	<b>433700</b>







## VALLEY

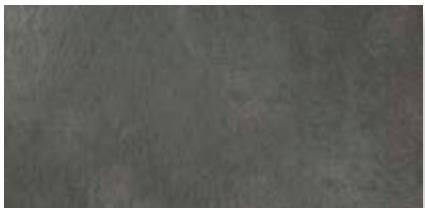


slate

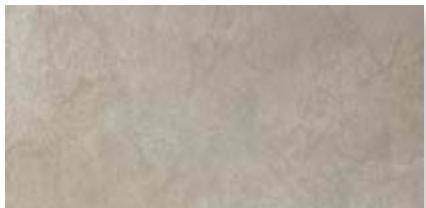

pebble-grey

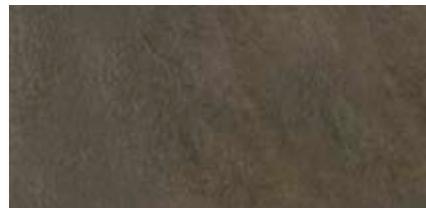

earth-brown

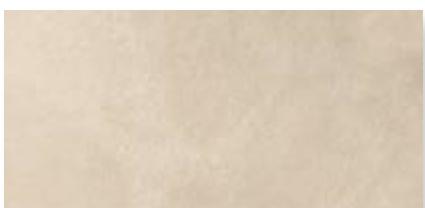

sand-beige



Nom. dim. - cm	30 x 60	60 x 60	60 x 120	75 x 75
Work size - mm	297 x 596 x 12	596 x 596 x 12	596 x 1195 x 12,5	748 x 748 x 12
Slip resistance	R10/A	R10/A	R10/A	R10/A
m <sup>2</sup> / Pieces	5,556	2,778	1,388	1,778
Pallet / Pieces	200	100	50	60
Pallet - m <sup>2</sup>	35,997	35,997	36,023	33,746
Pallet - kg	870,400	870,400	885,400	815,220

slate	052016DT	052020DT	052024DT	052028DT
pebble-grey	052017DT	052021DT	052025DT	052029DT
earth-brown	052018DT	052022DT	052026DT	052030DT
sand-beige	052019DT	052023DT	052027DT	052031DT


**Skirting**

Nom. dim. - cm	7 x 60	7 x 75
Work size - mm	70 x 596 x 10	70 x 748 x 10
m / Pieces	1,667	1,333
Bundle / Pieces	22	6
Bundle - m	13,197	4,501
Bundle - kg	20,460	7,200


slate	052072	052081
pebble-grey	052073	052082
earth-brown	052074	052083
sand-beige	052075	052084



## XENO

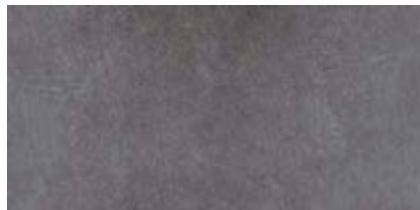

anthracite

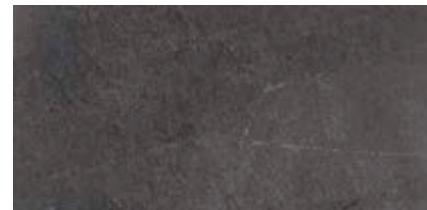

black



stone-grey

**Skirting**

Nom. dim. - cm	30 x 60
Work size - mm	297 x 597 x 12,5
Slip resistance	R10/A
m <sup>2</sup> / Pieces	5,556
Pallet / Pieces	200
Pallet - m <sup>2</sup>	35,997
Pallet - kg	886,400

Nom. dim. - cm	7 x 60
Work size - mm	70 x 597 x 10,5
Slip resistance	
m / Pieces	1,667
Bundle / Pieces	20
Bundle - m	11,998
Bundle - kg	20,600


anthracite      **432974DT**black      **432975DT**stone-grey      **432977DT**anthracite      **432805**black      **432806**stone-grey      **432808**

# DRYTILE JOINT COLORS

DryTile system tile; cement-based joint sealer in accordance with DIN EN 13888:2009; with less water absorption and high abrasion resistance; application exclusively in indoor areas; not approved for wet areas.

## System joint


Bundle - kg	5 kg packs	25 kg packs
grey	F-10805	F-10825
anthracite	F-10806	F-10826
beige	F-10807	F-10827
light grey	F-10808	F-10828

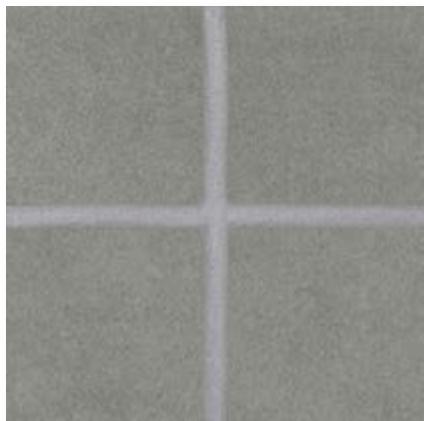

grey



anthracite

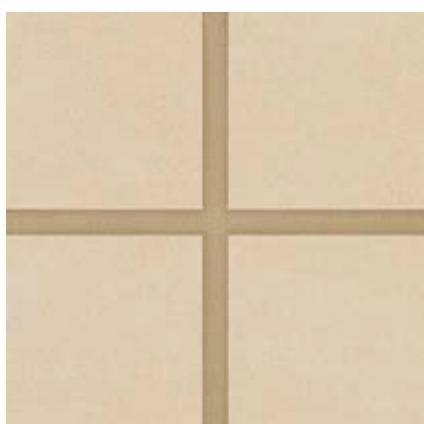

beige



light grey





DryTile Ceramics GmbH

Im Petersborn 2, D-56244 Ötzingen  
Tel.: +49 (0) 2602 682-1127  
Fax: +49 (0) 2602 682-301127  
E-mail: info@drytile-ceramics.de

[www.drytile-ceramics.de](http://www.drytile-ceramics.de)

04/2020

[www.assenmacher.net](http://www.assenmacher.net)

The publisher does not accept any liability for printing errors. Color deviations from original products may arise for technical printing reasons.



A member company of



DEUTSCHE STEINZEUG CREMER & BREUER AG

In cooperation with

